


**INDY
PENNY
TILE**

PRODUCT SPECIFICATIONS

Genuine U.S. pennies on mesh

Interlocking penny tile

Hand arranged in Indianapolis. Flexible fiberglass mesh and interlocking edges make a continuous penny surface.

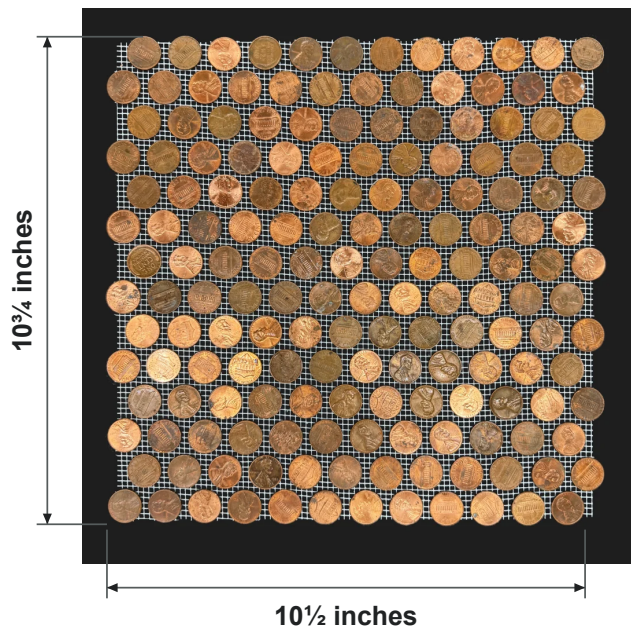

Actual product photo. Dimensions approximate.

APPROXIMATE DIMENSIONS

10 $\frac{1}{2}$ × 10 $\frac{3}{4}$ inches

INSTALLED COVERAGE

Approximately 0.80 sq. ft. per tile

PENNY COUNT & LAYOUT

168 pennies / 12 columns × 14 rows

PENNY DIAMETER

$\frac{3}{4}$ inch / 19.05 mm

PENNY SPACING

$\frac{5}{32}$ inch

BACKING & EDGES

Fiberglass mesh / interlocking edges

Coverage is before cuts and waste. Allow extra for perimeter cuts and the project layout.

DIMENSION NOTES

10 $\frac{3}{4}$ inches is measured flat edge to flat edge. 10 $\frac{1}{2}$ inches is measured from an outer penny edge to the opposite recessed penny edge. Dimensions are approximate; verify the actual tile when planning. Penny diameter follows U.S. Mint coin specifications; total installed thickness depends on the setting material and finish.

INSTALLATION & CARE

Use compatible thinset and sanded grout. Trim the mesh between pennies. Fit penny halves at edges before grouting. Work in small sections and clean grout from penny faces promptly with a damp sponge.

A protective clear coat is recommended to help limit oxidation. We recommend two part pourable epoxy for floors and water based polyurethane in light coats for walls. Follow the thinset, grout, and finish manufacturers' instructions; they take precedence over this general guide.

Thinset, grout, and finish are not included. Penny halves are available separately. Coin tone, date, design, and orientation vary. Photographs do not guarantee the arrangement or finish of a future order.